


直连铜缆跳线

SFP28 兼容 Cisco 25G

Siemon兼容CISCO的SFP28高速直连无源铜缆(DAC)提供了一种高效的布线选择, 以满足当今的机架设计要求和未来的设备升级的需求。这些向下兼容的电缆组件被设计为与10G SFP+ Cisco设备一起使用而不会产生告警消息, 并且可以迁移到25G的SFP28设备而无需更换布线。

我们的DAC铜缆提供全球兼容的CM/LSOH双阻燃外皮, 提供从0.5m到5m的长度选择。全屏蔽的 SFP+ 跳线包含双同轴屏蔽电缆和坚固的压铸外壳组件以增强支持高频数据传输速率。这些阻抗相匹配的SFP+跳线确保了互操作性, 并通过其全屏蔽的设计, 最大限度地减少EMI泄漏。

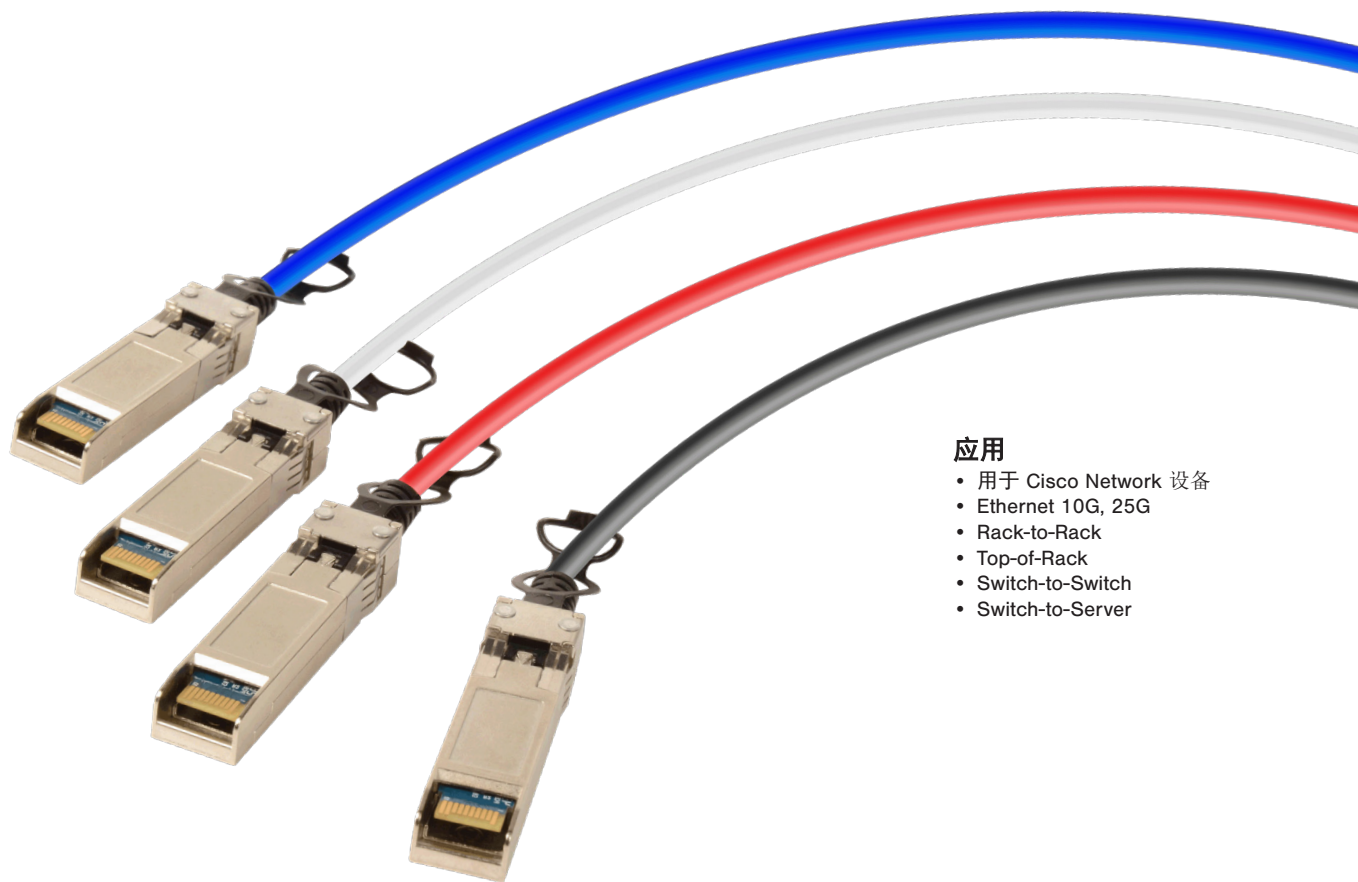

应用

- 用于 Cisco Network 设备
- Ethernet 10G, 25G
- Rack-to-Rack
- Top-of-Rack
- Switch-to-Switch
- Switch-to-Server

黑色	白色	红色	蓝色	长度	线规
SFPG-P-D00.5B01	SFPG-P-D00.5B02	SFPG-P-D00.5B03	SFPG-P-D00.5B06	0.5m (1.64 ft.)	30AWG
SFPG-P-D01.0B01	SFPG-P-D01.0B02	SFPG-P-D01.0B03	SFPG-P-D01.0B06	1m (3.28 ft.)	30AWG
SFPG-P-D01.5B01	SFPG-P-D01.5B02	SFPG-P-D01.5B03	SFPG-P-D01.5B06	1.5m (4.92 ft.)	30AWG
SFPG-P-D02.0B01	SFPG-P-D02.0B02	SFPG-P-D02.0B03	SFPG-P-D02.0B06	2m (6.56 ft.)	30AWG
SFPG-P-B02.5B01	SFPG-P-B02.5B02	SFPG-P-B02.5B03	SFPG-P-B02.5B06	2.5m (8.20 ft.)	26AWG
SFPG-P-B03.0B01	SFPG-P-B03.0B02	SFPG-P-B03.0B03	SFPG-P-B03.0B06	3m (9.84 ft.)	26AWG
SFPG-P-B04.0B01	SFPG-P-B04.0B02	SFPG-P-B04.0B03	SFPG-P-B04.0B06	4m (13.12 ft.)	26AWG
SFPG-P-B05.0B01	SFPG-P-B05.0B02	SFPG-P-B05.0B03	SFPG-P-B05.0B06	5m (16.40 ft.)	26AWG

产品信息

常规

Operating Temperature	-10°C to 70°C (14°F to 158°F)
Flammability Rating	UL CL2 FT4
Shield	Braid/Foil

机械性能

Conductor	Tinner Copper
Wire Gauge	30AWG or 26AWG
Impedance	100 ± 10 ohms
Construction	Twinmax
Cable OD	30AWG = 4.5mm (.177 in.) 26AWG = 5.2mm (.204 in.)
Jacket Type	CL2/LS0H
Bend Radius	30AWG = 22.5mm (.885 in.) 26AWG = 26mm (1.023 in.)
Channels	1 Lane - Bidirectional

电气性能

Min. Electrical Withstand Voltage	400VDC
Insulation Resistance	1000 Mohms
Current Rating	0.5 Amp/Signal Contact
Power Consumption	600mw Max.

满足标准

Electrical	SFF-8419
Mechanical	SFF-8432
EEPROM	SFF-8472
RoHS	Compliant


彩色线缆夹:

我们的彩色编码线缆夹采用高度可识别、可靠匹配线缆的设计，可以很方便的现场安装在Siemon SFP+线缆组件上。有8种颜色可供选择，这些颜色编码的线缆夹为数据中心管理员提供定义线缆的能力，以清楚地区分和识别不同的网络。

型号 说明

CLIP-CBL-50-(XX).... 彩色编码线缆夹，用于30和28 AWG线缆，一包25个
CLIP-CBL-62-(XX).... 彩色编码线缆夹，用于26和24 AWG线缆，一包25个

(XX) 代表颜色:
02 = 白色, 03 = 红色, 04 = 灰色, 05 = 黄色, 06 = 蓝色, 07 = 绿色, 08 = 紫色, 09 = 橙色

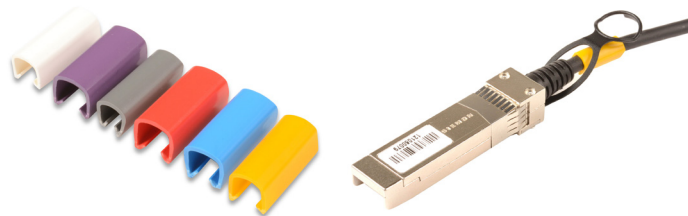

由于我们不断地改进我们的产品，西蒙保留未经事先通知即改变规格和可用性的权利。

North America P: (1) 860 945 4200	Asia Pacific P: (61) 2 8977 7500	Latin America P: (571) 657 1950/51/52	Europe P: (44) 0 1932 571771	China P: (86) 215385 0303	India Middle East P: (971) 4 3689743
---	--	---	--	-------------------------------------	--

Siemon Interconnect Solutions
P: (1) 860 945 4213
www.siemon.com/SIS